

B2 Series, 2-Way, Characterized Control Valve Chrome Plated Brass Ball and Brass Stem





Application


This valve is typically used in air handling units on heating or cooling coils, and fan coil unit heating or cooling coils. Some other common applications include Unit Ventilators, VAV box re-heat coils and bypass loops. This valve is suitable for use in a hydronic system with variable flow.

Technical Data	
Service	chilled or hot water, 60% glycol
Flow characteristic	A-port equal percentage
Action	90° rotation
Sizes	1/2", 3/4"
Type of end fitting	NPT female ends
Materials:	
Body	forged brass, nickel plated
Ball	chrome plated brass
Stem	nickel plated brass
Seats	PTFE
Characterizing disc	Tefzel®
Packing	2 EPDM O-rings, lubricated
Body pressure rating	600 psi
Media temp. range	0°F to 212°F [-18°C to 100°C]
Close off pressure	200 psi
Maximum differential	30 psi for typical applications
pressure (ΔP)	
Leakage	0% for A to AB
External leakage	according to EN 12266-1:2003
C _v rating	A-port: see product chart for values
Tefzel® is a registered trademark of DuPo	nt

	Valve Nominal Size		Туре	5	Suitable Actuators			
Cv	Inches DN [mm]		2-way NPT	Non-S	Non-Spring		Spring	
0.3	1⁄2	15	B207B					
0.46	1/2	15	B208B					
0.8	1/2	15	B209B					
1.2	1/2	15	B210B					
1.9	1/2	15	B211B					
3	1/2	15	B212B			ies	ies	
4.7	1⁄2	15	B213B		Series	Series	LF Series	
7.4	1/2	15	B214B		Е	Ë	5	
10	1/2	15	B215B*					
4.7	3⁄4	20	B217B					
7.4	3⁄4	20	B218B					
10	3⁄4	20	B219B					
24	3⁄4	20	B220B*					

*Models without characterizing disc


Dimensions



—— A —►

2WayValve-B207-B220

	Valve Nominal Size		Dimensions (Inches [mm])
Valve Body	Inches	DN [mm]	Α	В
B207B-B211B	1⁄2"	15	2.41" [61.1]	1.39" [35.2]
B212B-B215B	1⁄2"	15	2.38" [60.4]	1.78" [45.2]
B217B-B220B	3⁄4"	20	2.73" [69.3]	1.87" [47.4]

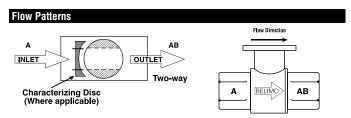

TR24-SR Actuators, Proportional



D069





Models

TR24-SR-T US

TR24-SR US TR24-SR/300 US TR24-SR/500 US

TR24-SR-T US with 3 ft plenum rated cable TR24-SR-T US with 10 ft plenum rated cable TR24-SR-T US with 16 ft plenum rated cable


Technical Data	
Control	proportional
Nominal voltage	24 VAC 50/60 Hz, 24 VDC
Nominal voltage range	19.228.8 VAC, 21.628.8 VDC
Power consumption	0.5 W
Transformer sizing	1VA (class 2 power source)
Electrical connection	screw terminals accessible after removal of small cover (3 ft, 10 ft, 16 ft cables optional)
Input impedance	100 kΩ
Angle of rotation	90°
Direction of rotation	reversible with switch under cover
Position indication	integrated into handle
Manual override	push down handle
Running time	90 seconds
Humidity	5 to 95% non-condensing
Ambient temperature	-22°F to 122°F (-30°C to 50°C)
Storage temperature	-40°F to 176°F (-40°C to 80°C)
Housing	NEMA 1/IP40
Housing rating	UL94-5V(B)
Agency listing†	cULus according to UL 60730-1A/-2-14, CAN/ CSA E60730-1:02, CE according to 2004/108/ EC and 2006/95/EC for line voltage and/or –S versions
Noise level	max. 35 db (A)
Quality standard	ISO 9001


† Rated impulse voltage 500V, Control pollution degree 2, Type of action 1

NOTE: Response sensitivity is 75mV

2.50 [63.5] 2.82 [71.6]


Dimensions with 2-Way Valve






	Valve Nominal Size		Dimensions ((Inches [mm])	
Valve Body	Inches	DN [mm]	Α	В	
B207(B)-B211(B)	1⁄2"	15	2.41" [61.1]	1.39" [35.2]	
B212(B)-B215(B)	1⁄2"	15	2.38" [60.4]	1.78" [45.2]	
B217(B)-B220(B)	3⁄4"	20	2.73" [69.3]	1.87" [47.4]	







	Valve Nominal Size		Dimen	Dimensions (Inches		
Valve Body	Inches	DN [mm]	Α	В	C	
B307(B)-B311(B)	1⁄2"	15	2.41" [61.1]	1.39" [35.2]	1.20" [30.6]	
B312(B)-B315(B)	1⁄2"	15	2.38" [60.4]	1.78" [45.2]	1.29" [32.8]	
B317(B)-B320(B)	3⁄4"	20	2.73" [69.3]	1.87" [47.4]	1.47" [37.3]	

TR24-SR Actuators, Proportional



Wiring Diagrams

📈 INSTALLATION NOTES

Actuators with color coded wires are optional. ∕2∖

Wire numbers are provided for reference.

CAUTION Equipment damage!


Actuators may be connected in parallel.

Power consumption and input impedance must be observed.

∕3∖ Actuators may also be powered by 24 VDC.

WARNING Live Electrical Components!

Ľ During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.

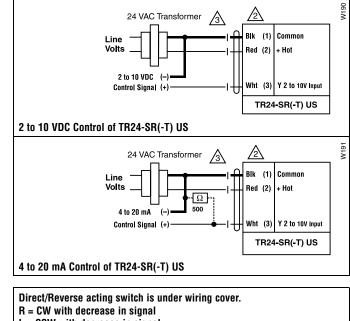

L = CCW with decrease in signal

No feedback